Dynamical indicators for the prediction of bursting phenomena in high-dimensional systems

Mohammad Farazmand and Themistoklis P. Sapsis

Department of Mechanical Engineering,

Massachusetts Institute of Technology,

77 Massachusetts Ave., Cambridge, MA, USA

Abstract

Drawing upon the bursting mechanism in slow-fast systems, we propose indicators for the prediction of such rare extreme events which do not require a priori known slow and fast coordinates. The indicators are associated with functionals defined in terms of Optimally Time Dependent (OTD) modes. One such functional has the form of the largest eigenvalue of the symmetric part of the linearized dynamics reduced to these modes. In contrast to other choices of subspaces, the proposed modes are flow invariant and therefore a projection onto them is dynamically meaningful. We illustrate the application of these indicators on three examples: a prototype low-dimensional model, a body forced turbulent fluid flow, and a unidirectional model of nonlinear water waves. We use Bayesian statistics to quantify the predictive power of the proposed indicators.

1

I. INTRODUCTION

Complex irregular behavior is a characteristic of chaotic systems, which is usually visualized through the time series of an observable. Many natural and engineering systems exhibit a second level of complexity typified by rare extreme bursts in the time series of certain observables. They are rare in the sense that they are short-lived and the frequency at which they occur is significantly smaller than the typical frequency of the time series; and they are extreme in the sense that they correspond to the values of the observable that are several standard deviations away from its mean value. Examples of such rare, extreme phenomena in nature include oceanic rogue waves [1, 2], intermittent fluctuations in turbulent models [3–5] and extreme events in climate dynamics [6, 7]. While the prediction of extreme events is of utmost importance, our dim understanding of their origins and precursors has impeded our ability to predict them.

A promising approach is to predict the rare events directly from the time series of the observable. If the system has a compact, finite-dimensional attractor, the dynamics can in principle be reconstructed from the observations by delay-coordinate embedding techniques [8–10], or linear and/or nonlinear order reduction methods [11–15]. However, for high-dimensional chaotic attractors the reconstructed dynamics have a poor forecasting skill (see e.g. [15, 16]) which is comparable with Mean Square Models (models based on carefully tuned Langevin equations [17]). Since rare extreme events are associated with strong nonlinearities and intermittently positive Lyapunov exponents (i.e., high sensitivity to perturbations), their prediction from a finite set of observations is challenging and remains an active area of research (see, e.g., Giannakis and Majda [18], Bialonski *et al.* [19]).

A more physically illuminating approach comes from multiscale analysis, where a dynamical system model is decomposed into slow and fast variables [20–22] or stable and unstable manifolds [23, 24]. The bursting mechanism in these models is rather well-understood [25, 26]. For the most part, the dynamics takes place on the slow manifold. The slow dynamics may be chaotic, but no bursting event occurs on the slow manifold itself. The bursts occur along the unstable manifold (of the slow manifold) and correspond to the growth of the fast variables. The unstable manifold is typically homoclinic to the slow manifold such that the flow returns eventually to the slow manifold [27]. This cycle can repeat indefinitely and, if the slow dynamics is chaotic, irregularly (see figure 1, for an
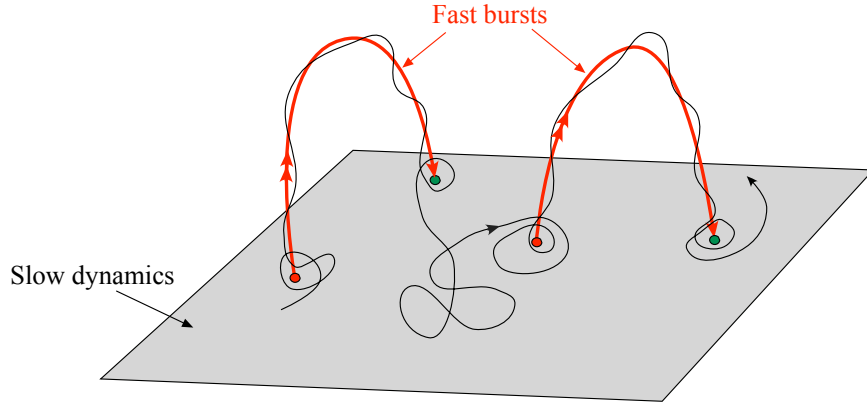
FIG. 1. An illustration of slow-fast systems with bursting orbits homoclinic to the slow manifold. While we depict the slow manifold with a plane, it can in reality be a complicated high dimensional manifold.

illustration).

While this geometric approach is certainly illuminating, it is of little applicability to complex systems, since a clear separation of time scales is often not available in realistic models (e.g., Navier–Stokes equations). Nor does there exist a general recipe to transform the coordinates into slow and fast variables [28]. This becomes particularly prohibitive in high dimensional systems.

Here, we introduce a diagnostic indicator for the prediction of rare extreme events in high dimensional systems. The indicator is based on the aforementioned observations on the multiscale systems but does not require a priori known fast-slow coordinates. More precisely we show that a small number of optimally time-dependent (OTD) modes [29], obtained through a minimization principle and the history of the system state up to the current time instant, allows for the description of the currently most unstable subspace in a dynamically consistent fashion. We show that the linearized dynamics projected in this optimal, time-dependent subspace, can predict an upcoming rare extreme event. We note that simply computing the eigenvalues of the linearized dynamics is costly and, in many cases, the results are completely oblivious to transient instabilities (e.g. instabilities associated with non-normal dynamics, [29]).

In Section II, we review the OTD modes and introduce our indicator. We demonstrate the application of the indicator on three examples: a low dimensional prototype system (Section III), a body forced Navier–Stokes equation (Section IV) and a modified nonlinear

Schrödinger equation as a model for unidirectional water waves (Section V). The concluding remarks are presented in Section VI.

II. PRELIMINARIES

A. Set-up

Consider the general nonlinear system of ordinary differential equations (ODEs),

$$\dot{\mathbf{u}} = \mathbf{F}(\mathbf{u}), \quad \mathbf{u} \in \mathbb{R}^n, \tag{1}$$

where the vector field $\mathbf{F} : \mathbb{R}^n \to \mathbb{R}^n$ is sufficiently smooth. We denote the solutions of (1) with the initial condition $\mathbf{u}_0$ at time t_0 by $\mathbf{u}(t; t_0, \mathbf{u}_0) = \varphi_{t_0}^t(\mathbf{u}_0)$ where $\varphi_{t_0}^t$ is the flow map. Infinitesimal perturbations around an arbitrary trajectory $\mathbf{u}(t)$ satisfy the linear equation

$$\dot{\mathbf{v}} = \mathbf{L_u}\mathbf{v}, \quad \mathbf{v} \in \mathbb{R}^n, \tag{2}$$

where $\mathbf{L}_{\mathbf{u}(t)} := \boldsymbol{\nabla}\mathbf{F}(\mathbf{u}(t))$. For notational simplicity, we will write $\mathbf{L}$ instead of $\mathbf{L_u}$.

For a given trajectory $\mathbf{u}(t; t_0, \mathbf{u}_0)$, there exists a two-parameter family of linear maps $\Phi_{t_0}^t(\mathbf{u}_0) : \mathbb{R}^n \to \mathbb{R}^n$ such that the solutions of the linear equation (2) satisfy $\mathbf{v}(t; t_0, \mathbf{v}_0) = \Phi_{t_0}^t(\mathbf{u}_0)\mathbf{v}_0$ [30]. For notationally simplicity, we denote the solutions of the linear equation (2) by $\mathbf{v}(t)$ and write $\mathbf{v}(t) = \Phi_{t_0}^t\mathbf{v}_0$ along a given trajectory $\mathbf{u}(t) = \mathbf{u}(t; t_0, \mathbf{u}_0)$ of the nonlinear system (1).

In order to introduce the OTD modes, we will need the following definition.

Definition 1. A time-dependent r-dimensional subspace $E_r(t)$ of $\mathbb{R}^n$ is *flow invariant* under the system (2) if, for a fixed initial time t_0, we have

$$\mathbf{v}(t) = \Phi_{t_0}^t\mathbf{v}_0 \in E_r(t), \quad \forall \mathbf{v}_0 \in E_r(t_0), \quad \forall t \geq t_0. \tag{3}$$

B. Optimally time-dependent modes

For $r = n$ in Definition 1, we have $E_n(t) = \mathbb{R}^n$ for all t and therefore the space is trivially flow invariant. Lower dimensional flow invariant subspaces can in principle be constructed as
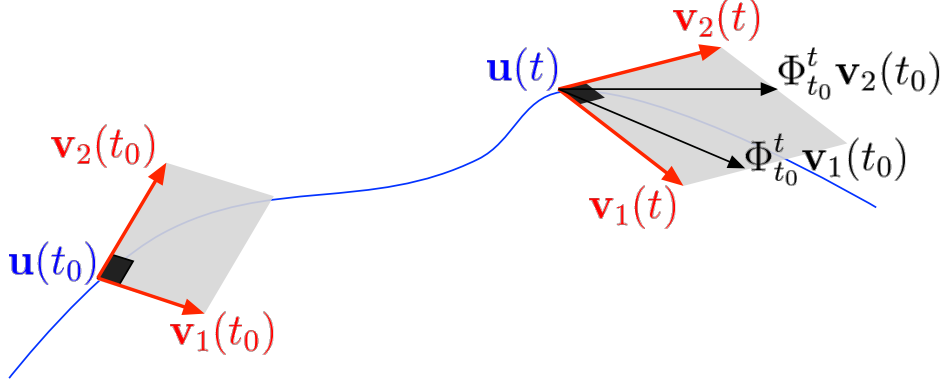
FIG. 2. An illustration of the OTD modes. The OTD modes $\mathbf{v}_i$ remain orthonormal for all times (the dark black squares mark right angles). While differing from their images under the linear dynamics $\Phi_{t_0}^t$, the OTD modes span the same subspace as their images.

follows. Consider a prescribed set of r vectors $\{\mathbf{v}_1(t_0), \cdots, \mathbf{v}_r(t_0)\}$ spanning an r dimensional subspace $E_r(t_0)$. For any later time $t > t_0$, let $\mathbf{v}_i(t)$ be the solutions of the liner equation (2) with the initial condition $\mathbf{v}_i(t_0)$ and define $E_r(t) = \text{span}\{\mathbf{v}_1(t), \cdots, \mathbf{v}_r(t)\}$. Since the map $\Phi_{t_0}^t$ is a bijection, the dimension of the linear subspace $E_r(t)$ is equal to r. Moreover, the subspaces $E_r(t)$, constructed as such, are flow invariant by definition.

This procedure is, however, known to be numerically unstable: typically the lengths of the vectors $\mathbf{v}_i$ grow exponentially fast and the angle between them vanishes rapidly. As a result, many numerical techniques have been introduced to compute the flow invariant subspace in a numerically robust fashion (see, e.g., Greene and Kim [31], Dieci and Elia [32]).

The OTD equations, introduced recently by Babaee and Sapsis [29], is a modification to the equation of variations (2) such that its solutions (the OTD modes) remain orthonormal for all times, yet they span the same flow invariant subspaces as the solutions of the equation of variations.

Here, we briefly review the OTD equations and the main properties of their solutions, referring the interested reader to [29] for details. The OTD equations read

$$\dot{\mathbf{v}}_i = \mathbf{L}_\mathbf{u}\mathbf{v}_i - \sum_{k=1}^{r} \langle \mathbf{L}_\mathbf{u}\mathbf{v}_i, \mathbf{v}_k \rangle \mathbf{v}_k, \quad i \in \{1, 2, \cdots, r\}, \tag{4}$$

where $\langle \cdot, \cdot \rangle$ denotes an appropriate inner product and $1 \leq r \leq n$ is some prescribed integer. Equations (4), together with the original system (1), form a set of $(r+1)$ coupled nonlinear

differential equations for vectors $\mathbf{v}_i \in \mathbb{R}^n$ and the state $\mathbf{u}$. Note that without the summation term, the OTD equation (4) coincides with the equation of variations (2). The summation terms impose the constraint that the solutions $\mathbf{v}_i$ remain orthonormal with respect to the inner product $\langle \cdot, \cdot \rangle$.

We refer to the solutions $\mathbf{v}_i$ of the OTD equation as the *OTD modes*, which have the following appealing properties.

1. The OTD equations preserve orthonormality: Let the initial condition for the OTD equations (4) be a set of orthonormal vectors $\{\mathbf{v}_1(t_0), \mathbf{v}_2(t_0), \cdots, \mathbf{v}_r(t_0)\}$. Then the solution $\{\mathbf{v}_1(t), \mathbf{v}_2(t), \cdots, \mathbf{v}_r(t)\}$ of the OTD equation remains orthonormal for all times t [see 29, Theorem 2.1].

2. The OTD modes span flow invariant subspaces: Define

$$E_r(t) = \mathrm{span}\{\mathbf{v}_1(t), \mathbf{v}_2(t), \cdots, \mathbf{v}_r(t)\}, \tag{5}$$

with $\{\mathbf{v}_1(t), \mathbf{v}_2(t), \cdots, \mathbf{v}_r(t)\}$ being an orthonormal solution of the OTD equation (4). Then the subspaces $E_r(t)$ are flow invariant under the linear system (2) [see 29, Theorem 2.4].

3. If $\mathbf{u}$ is a hyperbolic fixed point, the OTD modes generically converge to the subspace spanned by the r least stable eigenvectors of $\mathbf{L_u}$ [see 29, Theorem 2.3].

Figure 2 illustrates the geometry of OTD modes for $r = 2$.

C. Reduction to the OTD modes

Due to the flow invariance of the OTD modes, we can reduce the linear operator $\mathbf{L_u}$ to the OTD subspaces $E_r(t)$ in a dynamically consistent fashion. More precisely, consider the solutions of the form $\mathbf{v}(t) = \mathbf{V}(t)\boldsymbol{\eta}(t)$ where $\mathbf{V} = [\mathbf{v}_1 | \mathbf{v}_2 | \cdots | \mathbf{v}_r] \in \mathbb{R}^{n \times r}$ is the time dependent matrix whose columns are the OTD modes obtained from (4). The vector $\boldsymbol{\eta} \in \mathbb{R}^r$ is the solution $\mathbf{v}$ expressed in the OTD basis.

Substituting $\mathbf{v}(t) = \mathbf{V}(t)\boldsymbol{\eta}(t)$ in (2) yields the *reduced linear equation*

$$\dot{\boldsymbol{\eta}} = \mathbf{V}^\dagger \mathbf{L} \mathbf{V} \boldsymbol{\eta}. \tag{6}$$

Conversely, if $\boldsymbol{\eta}(t)$ solves the reduced equation (6), then $\mathbf{v}(t) = \mathbf{V}(t)\boldsymbol{\eta}(t)$ solves the full linear equation (2) [see 29, Theorem 2.4]. We refer to the linear map $\mathbf{L}_r : \mathbb{R}^r \to \mathbb{R}^r$,

$$\mathbf{L}_r(t) := \mathbf{V}^\dagger(t)\mathbf{L}(t)\mathbf{V}(t), \tag{7}$$

as the *reduced linear operator*.

The reduced system (6) is a linear system of differential equations with a time dependent stability matrix $\mathbf{L}_r(t)$. As a result, the eigenvalues of $\mathbf{L}_r$ may not be used to assess linear growth or decay of perturbations. Instead we use the invariants of the symmetric part of $\mathbf{L}_r$ as an indicator.

It follows from (6) that

$$\frac{1}{2}\frac{\mathrm{d}}{\mathrm{d}t}|\boldsymbol{\eta}|^2 = \langle \boldsymbol{\eta}, \mathbf{L}_r\boldsymbol{\eta} \rangle = \langle \boldsymbol{\eta}, \mathbf{S}_r\boldsymbol{\eta} \rangle, \tag{8}$$

where $\mathbf{S}_r$ denotes the symmetric part of the matrix $\mathbf{L}_r$, i.e.,

$$\mathbf{S}_r := \frac{1}{2}\left[\mathbf{L}_r + \mathbf{L}_r^\dagger\right]. \tag{9}$$

The eigenvalues $\lambda_1 \geq \lambda_2 \geq \cdots \geq \lambda_r$ of the symmetric tensor $\mathbf{S}_r \in \mathbb{R}^{r \times r}$, therefore, measure the instantaneous linear growth (or decay) of perturbations within the OTD subspace $E_r(t)$. Furthermore, the identity (8) implies the inequality

$$|\boldsymbol{\eta}(t_0)|e^{\lambda_{min}(t-t_0)} \leq |\boldsymbol{\eta}(t)| \leq |\boldsymbol{\eta}(t_0)|e^{\lambda_{max}(t-t_0)}, \quad \forall t \in [t_0, t_0 + T], \tag{10}$$

for $T > 0$ and $\lambda_{min} \leq \lambda_{max}$ defined as

$$\lambda_{min} := \min_{\tau \in [t_0, t_0+T]} \lambda_r(\tau), \quad \lambda_{max} := \max_{\tau \in [t_0, t_0+T]} \lambda_1(\tau). \tag{11}$$

In particular, if λ_{min} is positive, the perturbations within the OTD subspace $E_r(t_0)$ grow exponentially fast over the time interval $[t_0, t]$.

Based on the above observation, we use the eigenvalue configuration of the symmetric tensor $\mathbf{S}_r$ as the indicator for an upcoming burst. In so doing, we assume that the OTD modes capture the most unstable flow invariant subspace along a time-dependent trajectory. As pointed out in Section II B, this has been proved by Babaee and Sapsis [29, Theorem 2.3] for hyperbolic fixed points, but remains an open problem for time-dependent trajectories.

In case the slow manifold is known as a graph over the slow variables, the connection between the largest eigenvalue λ_1 of the reduced symmetric tensor $\mathbf{S}_r$ and the instabilities transverse to the slow manifold can be made rigorous as shown by Haller and Sapsis [33]. In practice, this graph is rarely known.

III. CONCEPTUAL MODEL

For illustrative purposes, we construct a prototype system which has simple dynamics with bursting episodes. The system is described by the set of nonlinear ODEs,

$$\dot{x} = \alpha x + \omega y + \alpha x^2 + 2\omega xy + z^2$$
$$\dot{y} = -\omega x + \alpha y - \omega x^2 + 2\alpha xy$$
$$\dot{z} = -\lambda z - (\lambda + \beta)xz, \tag{12}$$

where $\alpha, \omega, \lambda, \beta > 0$ are constant parameters. We define $\mathbf{u} = (x, y, z)$ and denote the right-hand-side of (12) by $\mathbf{F}(\mathbf{u})$. The plane $z = 0$ is an invariant manifold containing the two fixed points

$$\mathbf{u}_1 = (0, 0, 0), \quad \mathbf{u}_2 = (-1, 0, 0).$$

Linearizing around these fixed points, we obtain

$$\nabla \mathbf{F}(\mathbf{u}_1) = \begin{pmatrix} \alpha & \omega & 0 \\ -\omega & \alpha & 0 \\ 0 & 0 & -\lambda \end{pmatrix}, \quad \nabla \mathbf{F}(\mathbf{u}_2) = \begin{pmatrix} -\alpha & -\omega & 0 \\ \omega & -\alpha & 0 \\ 0 & 0 & \beta \end{pmatrix}. \tag{13}$$

The plane $z = 0$ is the linear unstable manifold E^u of $\mathbf{u}_1$ corresponding to the eigenvalues $\alpha \pm i\omega$. The plane $z = 0$ is also the linear stable manifold E^s of the fixed point $\mathbf{u}_2$ with eigenvalues $-\alpha \pm i\omega$. In the following, we set $\alpha = 0.01$, $\omega = 2\pi$ and $\lambda = \beta = 0.1$.

Figure 3 shows a trajectory of the system starting near the origin. Perturbations around the fixed point $\mathbf{u}_1$ spiral away from the origin due to the instability in the $z = 0$ plane. Since $z = 0$ is also the stable manifold of the fixed point $\mathbf{u}_2$, the perturbed trajectory is attracted towards $\mathbf{u}_2$. Due to the small stability exponent $\alpha = 0.01$, this process takes place over a long period of time during which the z component of the trajectory stays small. Once close enough to the fixed point $\mathbf{u}_2$, its unstable manifold repels the trajectory away from $z = 0$ plane, resulting in a rapid growth of the z component. Finally the trajectory is carried back to the fixed point $\mathbf{u}_1$ along the heteroclinic orbit connecting the two fixed points. The above process repeats once the trajectory is back in the neighborhood of the origin $\mathbf{u}_1$.

Now we investigate the ability of the OTD modes to capture the instability responsible for the bursts. It is clear from the linearization that around the fixed point $\mathbf{u}_1$ the most unstable direction is within the $x - y$ plane. Near fixed point $\mathbf{u}_2$ however the z-direction
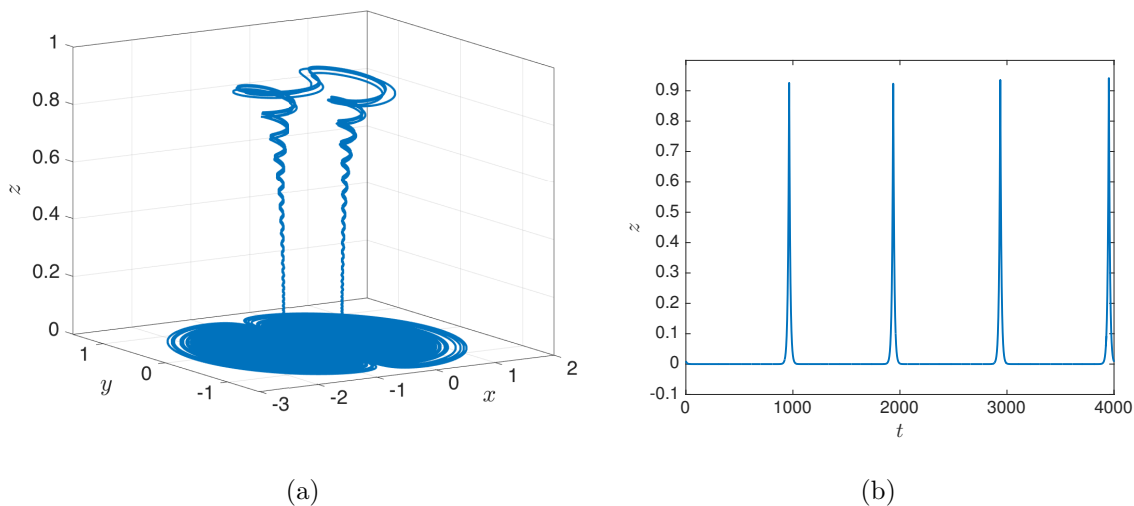
(a)   (b)

FIG. 3. A trajectory of the system (12) with parameters $\alpha = 0.01$, $\omega = 2\pi$, $\lambda = 0.1$ and $\beta = 0.1$. The initial condition is $(0, 0.01, 0.01)$. (a) The trajectory $\mathbf{u}(t)$ in the state space. (b) The time series of the z component of the trajectory for 4×10^3 time units.

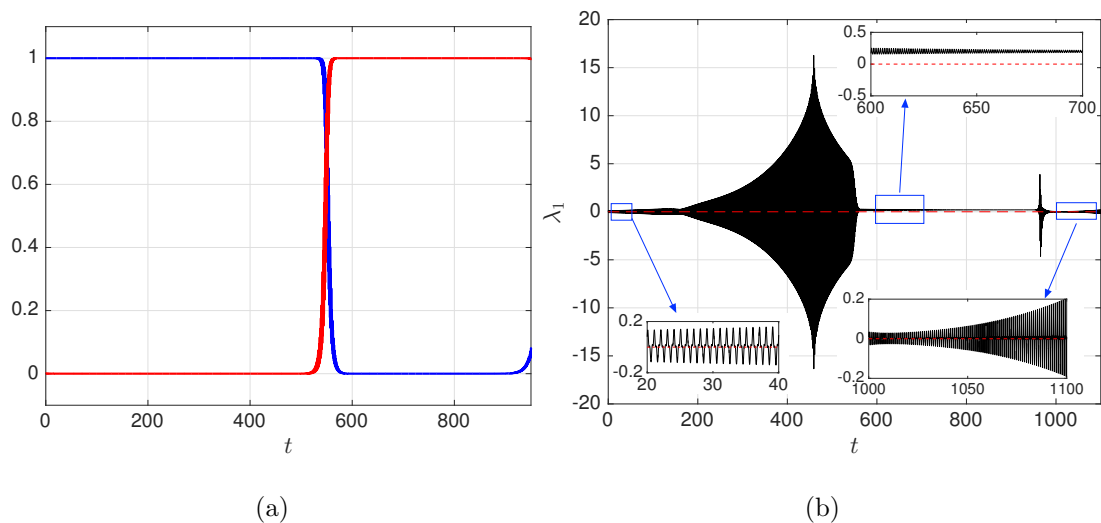(a)   (b)

FIG. 4. (a) The evolution of $\sqrt{v_{1,1}^2 + v_{1,2}^2} = \sqrt{1 - v_{1,3}^2}$ (blue) and $v_{1,3}$ (red) where $\mathbf{v}_1 = (v_{1,1}, v_{1,2}, v_{1,3})$. (b) The evolution of the eigenvalue λ_1 as a function of time. The dashed red line marks $\lambda_1 = 0$. Three closeup views are shown in the insets.

becomes the most unstable. We solve equation (12) together with the OTD equation (4) with a single OTD mode ($r = 1$). We choose the initial conditions $\mathbf{u} = (0, 0.01, 0.01)^\top$ and $\mathbf{v}_1(0) = \frac{1}{\sqrt{2}}(1, 1, 0)^\top$.

Figure 4(a) shows the evolution of $\sqrt{v_{1,1}^2 + v_{1,2}^2}$ and $v_{1,3}$ where $v_{1,i}$ denote the components

9

of $\mathbf{v}_1$, i.e., $\mathbf{v}_1 = (v_{1,1}, v_{1,2}, v_{1,3})$. For a long time, while the trajectory is spiraling away from $\mathbf{u}_1$, the z-component $v_{1,3}$ remains almost zero. As the trajectory moves towards the fixed point $\mathbf{u}_2$, a sharp transition occurs around time $t = 550$ where the OTD mode $\mathbf{v}_1$ becomes almost orthogonal to the $x - y$ plane and aligns with the z direction. Note that this transition (at $t = 550$) occurs well before the first burst (at $t = 950$) is observed (compare to figure 3(b)).

Figure 4(b) shows the eigenvalue λ_1 of the reduced symmetric matrix $\mathbf{S}_r$ as a function of time. Since we only use one mode, the eigenvalue is trivial: $\lambda_1(t) = \langle \mathbf{v}_1(t), \boldsymbol{\nabla}\mathbf{F}(\mathbf{u}(t))\mathbf{v}_1(t) \rangle$. Over the initial 550 time units, where the OTD mode $\mathbf{v}_1(t)$ is almost parallel to the $x - y$ plane, the eigenvalue λ_1 oscillates rapidly around zero. As a result any instantaneous growth in the OTD subspace is rapidly counteracted by an instantaneous decay. After time $t = 550$, when the OTD mode reorients orthogonally to the $x - y$ plane, the eigenvalue λ_1 becomes uniformly positive for a long period of time up until the bursting happens. This allows for persistent growth in the OTD subspace which aligns with the z axis in this period (cf. equation (10)). This instability persists up until the burst eventually happens around $t = 960$. After the burst the eigenvalue λ_1 goes back to oscillating around zero.

IV. TURBULENT FLUID FLOW

A ubiquitous feature of turbulent fluid flow is the intermittent bursts observed in the time series of their measured quantities such as energy dissipation [34, 35]. Even at moderate Reynolds numbers, the dimension of the turbulent attractors are high. Best available estimates suggest that the attractor dimension scales almost linearly with the Reynold number [36–38]. Moreover, no appropriate change of coordinates is available to decompose the system into slow and fast variables [39]. Consequently, intermittencies of turbulent fluid flow are particularly difficult to analyze and hence serve as a challenging example to test our indicator.

A. Governing equations and preliminaries

The two-dimensional Kolmogorov flow is the incompressible Navier–Stokes equations

$$\partial_t \mathbf{u} = -\mathbf{u} \cdot \boldsymbol{\nabla}\mathbf{u} - \boldsymbol{\nabla}p + \nu\Delta\mathbf{u} + \mathbf{f}, \quad \boldsymbol{\nabla} \cdot \mathbf{u} = 0, \tag{14}$$
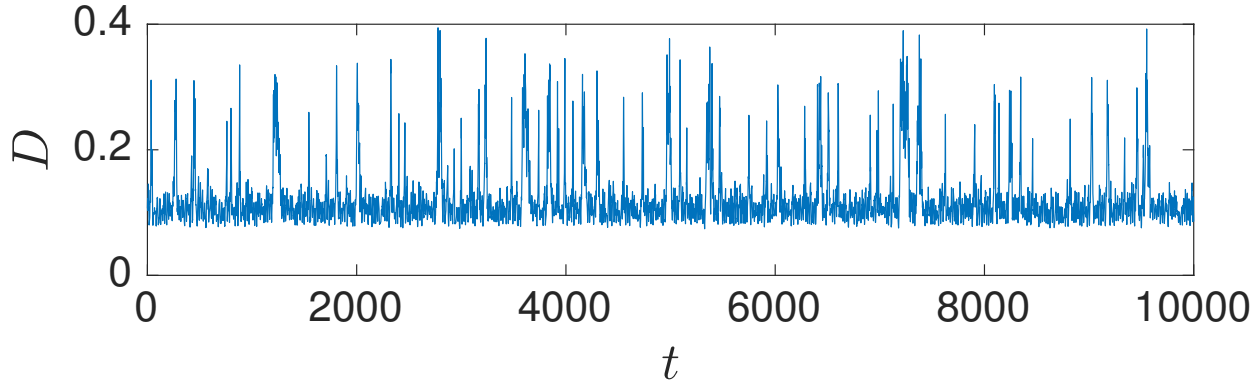
FIG. 5. Evolution of the energy dissipation D along a trajectory of the Kolmogorov flow (14) with $n = 4$ and $Re = 40$.

with the sinusoidal forcing $\mathbf{f} = \sin(ny)\mathbf{e}_1$ where $\mathbf{e}_1 = (1,0)^\top$ and n is a positive integer [40]. The flow is defined on the torus $\mathbf{x} = (x, y) \in \mathbb{T}^2 = [0, 2\pi] \times [0, 2\pi]$ (i.e., periodic boundary conditions). The solution is the time dependent pair of velocity field $\mathbf{u}(\mathbf{x}, t)$ and pressure $p(\mathbf{x}, t)$. The non-dimensional viscosity ν is the inverse of the Reynolds number, $\nu = 1/Re$.

The energy E, energy dissipation D and energy input I of the system are defined as

$$E(t) = \frac{1}{2L^2} \iint_{\mathbb{T}^2} |\mathbf{u}(\mathbf{x}, t)|^2 \mathrm{d}\mathbf{x}, \quad D(t) = \frac{\nu}{L^2} \iint_{\mathbb{T}^2} |\omega(\mathbf{x}, t)|^2,$$
$$I(t) = \frac{1}{L^2} \iint_{\mathbb{T}^2} \mathbf{u}(\mathbf{x}, t) \cdot \mathbf{f}(\mathbf{x}, t) \mathrm{d}\mathbf{x}, \tag{15}$$

where $L = 2\pi$ is the size of the domain and ω is the vorticity field. One can show, from the Navier–Stokes equation (14), that these three quantities satisfy $\dot{E} = I - D$ along any trajectory.

The Kolmogorov flow has a *laminar* solution,

$$\mathbf{u}_{lam} = \frac{Re}{n^2} \sin(ny)\mathbf{e}_1, \tag{16}$$

which is asymptotically stable for forcing wave number $n = 1$ and any Reynolds number Re [41, 42]. For $n > 1$ and sufficiently high Re, however, the laminar solution is unstable. Moreover, numerical evidence suggests that, for high enough Reynolds number and $n > 1$, the Kolmogorov flow is chaotic [40, 43]. Figure 5, for instance, shows the evolution of the energy dissipation measured along a trajectory of the Kolmogorov flow with $n = 4$ and $Re = 40$. The energy dissipation mostly oscillates irregularly around $D = 0.1$ and never settles down to a regular pattern. More interestingly, the energy dissipation exhibits intermittent, short-lived episodes of higher energy dissipation that we wish to predict.

B.   OTD modes for the Kolmogorov flow

In Section II B, we introduced the OTD modes for ordinary differential equations. The OTD modes for partial differential equations (PDEs) are defined in a similar manner, although more care should be exercised due to the infinite dimensionality of the system. In analogy with the ODEs, we define

$$\mathbf{F}(\mathbf{u}) = \mathbb{P}(-\mathbf{u} \cdot \boldsymbol{\nabla}\mathbf{u} + \nu\Delta\mathbf{u} + \mathbf{f}), \tag{17}$$

where $\mathbb{P}$ denotes the projection onto space of divergence-free vector fields, $\boldsymbol{\nabla} \cdot \mathbf{u} = \mathbf{0}$. As opposed to the ODEs, where $\mathbf{F}$ is a vector field, here it is a nonlinear differential operator acting on functions $\mathbf{u} : \mathbb{T}^2 \times \mathbb{R} \to \mathbb{R}^2$ that are sufficiently smooth.

We denote the linearization of $\mathbf{F}$ around the state $\mathbf{u}$ by $\mathbf{L_u}$ whose action on sufficiently smooth functions $\mathbf{v} : \mathbb{T}^2 \times \mathbb{R} \to \mathbb{R}^2$ is given by

$$\mathbf{L_u}\mathbf{v} := \mathbb{P}(-\mathbf{u} \cdot \boldsymbol{\nabla}\mathbf{v} - \mathbf{v} \cdot \boldsymbol{\nabla}\mathbf{u} + \nu\Delta\mathbf{v}). \tag{18}$$

The OTD modes $\{\mathbf{v}_1, \mathbf{v}_2, \cdots, \mathbf{v}_r\}$ then satisfy the set of coupled PDEs

$$\frac{\partial \mathbf{v}_i}{\partial t} = \mathbf{L_u}\mathbf{v}_i - \sum_{j=1}^{r}\langle\mathbf{L_u}\mathbf{v}_i, \mathbf{v}_j\rangle\mathbf{v}_j, \quad i \in \{1, 2, \cdots, r\}, \tag{19}$$

where $\langle\cdot, \cdot\rangle$ denotes some appropriate inner product. Here, we use the L^2 inner product

$$\langle\mathbf{v}, \mathbf{w}\rangle := \iint_{\mathbb{T}^2} \mathbf{v}(\mathbf{x}, t) \cdot \mathbf{w}(\mathbf{x}, t)\mathrm{d}\mathbf{x}. \tag{20}$$

We integrate equations (19) with initial conditions

$$\mathbf{v}_k(\mathbf{x}, 0) = \frac{1}{\pi\sqrt{2}}\begin{pmatrix} \sin(ky) \\ 0 \end{pmatrix}, \quad k = 1, 2, \cdots, r, \tag{21}$$

which are divergence free, mutually orthogonal and have unit L^2 norm.

The restriction of the infinite-dimensional operator $\mathbf{L_u}$ to the time-dependent OTD subspace $\{\mathbf{v}_k\}_{1 \leq k \leq r}$ is a reduced finite-dimensional linear operator $\mathbf{L}_r$. In the OTD basis, the reduced operator $\mathbf{L}_r$ is given by the $r \times r$ matrix whose entries are given by

$$[\mathbf{L}_r]_{ij} = \langle\mathbf{v}_i, \mathbf{L_u}\mathbf{v}_j\rangle, \quad i, j \in \{1, 2, \cdots, r\}. \tag{22}$$

Although the linear operator (18) acts on an infinite dimensional function space, the reduced operator $\mathbf{L}_r$ is a finite dimensional linear map whose symmetric part $\mathbf{S}_r$ is defined by (9).

We numerically integrate the Kolmogorov equation (14) and its associated OTD equations (19). To evaluate the right hand sides of the equations, we use a standard pseudo-spectral scheme with 2/3 dealiasing [44]. Unless stated otherwise, 128×128 Fourier modes are used for the simulations reported below. For the time integration, we use the Runge–Kutta scheme `RK5(4)` of Dormand and Prince [45] with relative and absolute error tolerances set to 10^{-5}.

C.   Asymptotically stable regime

As mentioned earlier, for the forcing wavenumber $n = 1$, the laminar solution (16) of the Kolmogorov equation (14) is asymptotically stable at any Re number. Moreover, the laminar solution is also the global attractor [42]. This regime is not our primary interest. It, however, does help illustrate the evolution of the OTD modes in an unambiguous setting.

We numerically solve the Kolmogorov equation and its associated OTD equations with $r = 2$. The state $\mathbf{u}$ is initially random in phase with an exponentially decaying energy spectrum. The initial conditions for the OTD modes are given in (21). Figure 6 shows the initial condition and the evolution of the state $\mathbf{u}$ and the OTD modes $\mathbf{v}_1$ and $\mathbf{v}_2$ at select time instances.

The eigenvalues of the symmetric tensor $\mathbf{S}_2$ are shown in figure 7. As the flow evolves towards the laminar solution, the eigenvalues of $\mathbf{S}_2$ oscillate before they converge to their asymptotic value of -0.025. One of the eigenvalues assumes positive values during this transition, signaling perturbations that can instantaneously grow. Since the laminar solution is the global attractor, the instantaneous growth cannot be sustained and decays eventually. As the state $\mathbf{u}(t)$ converges to the laminar solution (16), the OTD modes $\mathbf{v}_1$ and $\mathbf{v}_2$ converge to the least stable eigenspace of the linear operator (18) corresponding to eigenvalue -0.025 whose algebraic and geometric multiplicity happens to be equal to 2.
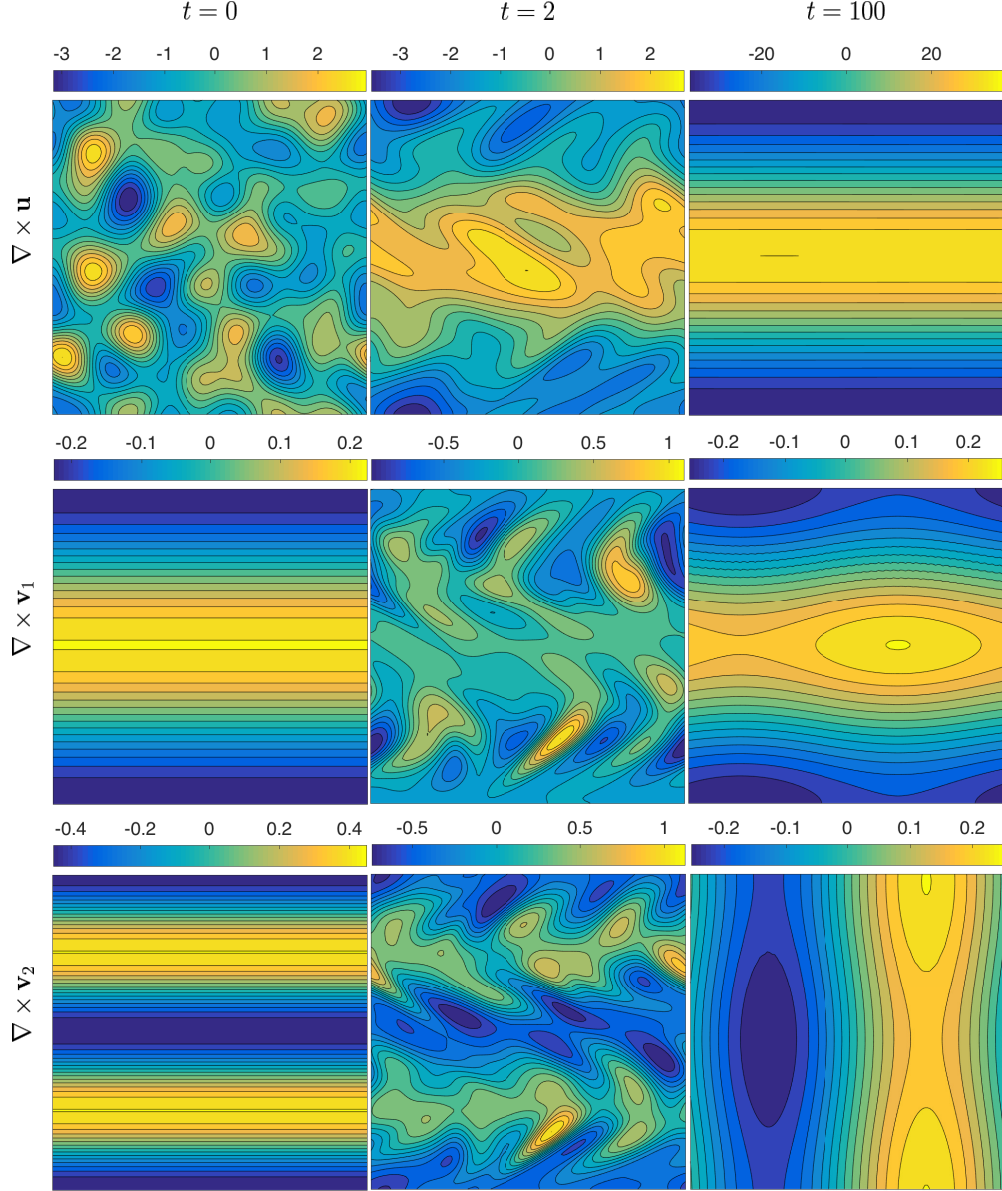
FIG. 6. The Kolmogorov flow in the asymptotically stable regime with $n = 1$ and $Re = 40$. Top row: The vorticity field at $t = 0$, 2 and 100. Middle row: curl of the first OTD mode $\mathbf{v}_1$ at $t = 0$, 2 and 100. Bottom row: curl of the second OTD mode $\mathbf{v}_2$ at $t = 0$, 2 and 100. The colors correspond to the only non-zero component of the curls. All panels show the entire domain $[0, 2\pi] \times [0, 2\pi]$.

D. Chaotic regime

We turn now to a set of parameters for which the Kolmogorov flow is chaotic. Numerical evidence suggests that, for $n = 4$ and $Re = 40$, the Kolmogorov flow has a strange attractor [43]. More importantly, the energy dissipation D exhibits an intermittent behavior along
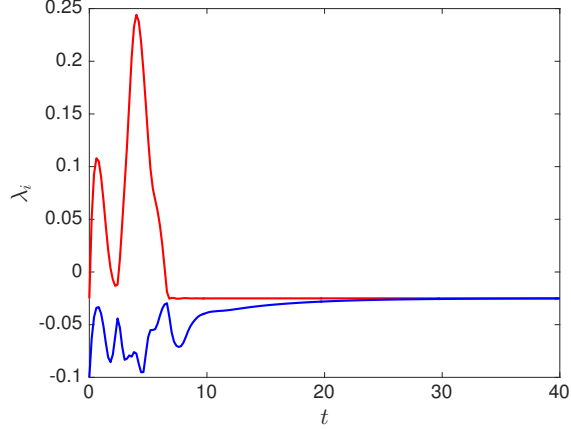
14

FIG. 7. Eigenvalues of the symmetric matrix $\mathbf{S}_2$ along a trajectory of the Kolmogorov flow in the asymptotically stable regime: $n = 1$ and $Re = 40$.

the trajectories on the strange attractor (see figure 5).

Figure 8 shows the energy input I versus the energy dissipation D for a long turbulent trajectory. During the evolution, the energy input and dissipation assume smaller values and are very close to each other sitting near the diagonal. The Kolmogorov flow is driven by the external forcing $\mathbf{f}$ such that growth in the energy input I corresponds to the alignment of the velocity field $\mathbf{u}$ and the forcing (see equation (15)). This alignment leads to an abrupt increase in the energy input I. Consequently, the energy dissipation also increases bringing the trajectory back to the statistically stationary background.

Based on this observation, one may argue that the growth of the perturbations aligning with the forcing should signal an upcoming burst in the energy input (and consequently the energy dissipation). The instantaneous growth of such a perturbation is measured by $\langle \mathbf{f}, \mathbf{L_u f} \rangle$ (cf. equation (8)). For any divergence free velocity field $\mathbf{u}(t)$ with zero mean, however, a straightforward calculation yields $\langle \mathbf{f}, \mathbf{L_u f} \rangle \simeq -7.896$. This seemingly paradoxical result is the consequence of the fact that the forcing $\mathbf{f}$ is not a flow invariant subspace and, as such, the instantaneously negative value of $\langle \mathbf{f}, \mathbf{L_u f} \rangle$ does not imply decay over finite time intervals. The OTD subspaces, in contrast, are flow invariant and therefore a projection onto them is dynamically meaningful.

The evolution of the eigenvalues of the symmetric tensor $\mathbf{S}_{12}$ along a turbulent trajectory are shown in figure 9. The first four eigenvalues are positive for all t in this time window, signaling the very unstable nature of the flow.
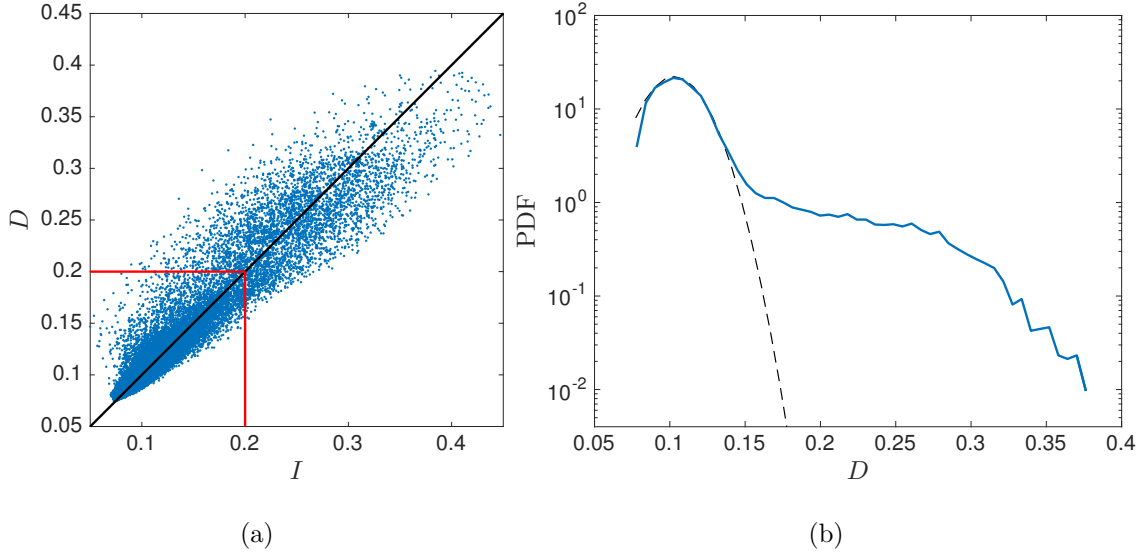
FIG. 8. (a) Energy input I versus energy dissipation D shown for a long turbulent trajectory. The dots correspond to 5×10^4 time instances each 0.2 time units apart. The trajectory spends approximately 91.8% of its lifetime inside the red box. The black line is the diagonal $I = D$. (b) The probability density function (PDF) of the energy dissipation. The dashed black line marks the PDF of a Gaussian distriction with mean 0.103 and standard deviation 0.018.
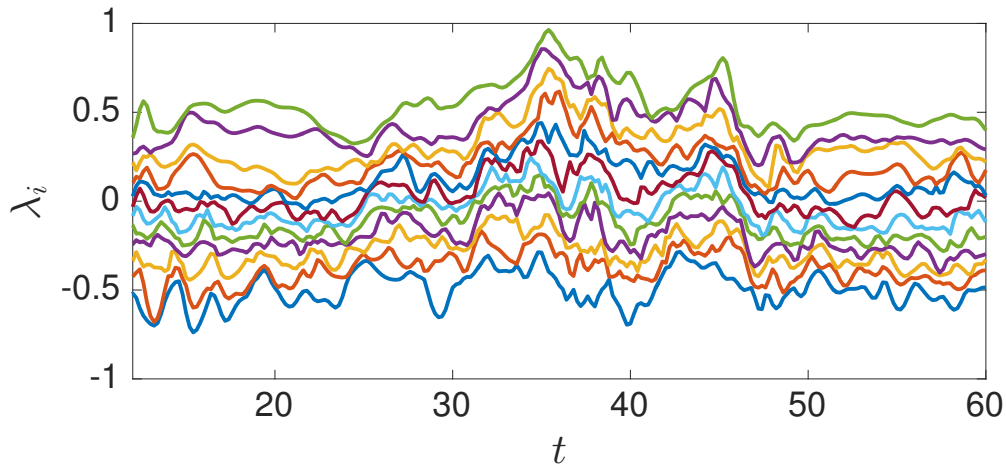

FIG. 9. Evolution of the eigenvalues $\lambda_1 \geq \lambda_2 \geq \cdots \geq \lambda_{12}$ of the reduced symmetric tensor $\mathbf{S}_{12}$ along a chaotic trajectory of the Kolmogorov flow.

Figure 10 shows select OTD modes at time $t = 34.6$ right before a burst in the energy dissipation occurs. The modes themselves do not exhibit a distinguished structural feature that could suggest an immediate connection to the burst. We notice, however, that the largest eigenvalue λ_1 of the symmetric part of the reduced linear operator $\mathbf{L}_r$ increases
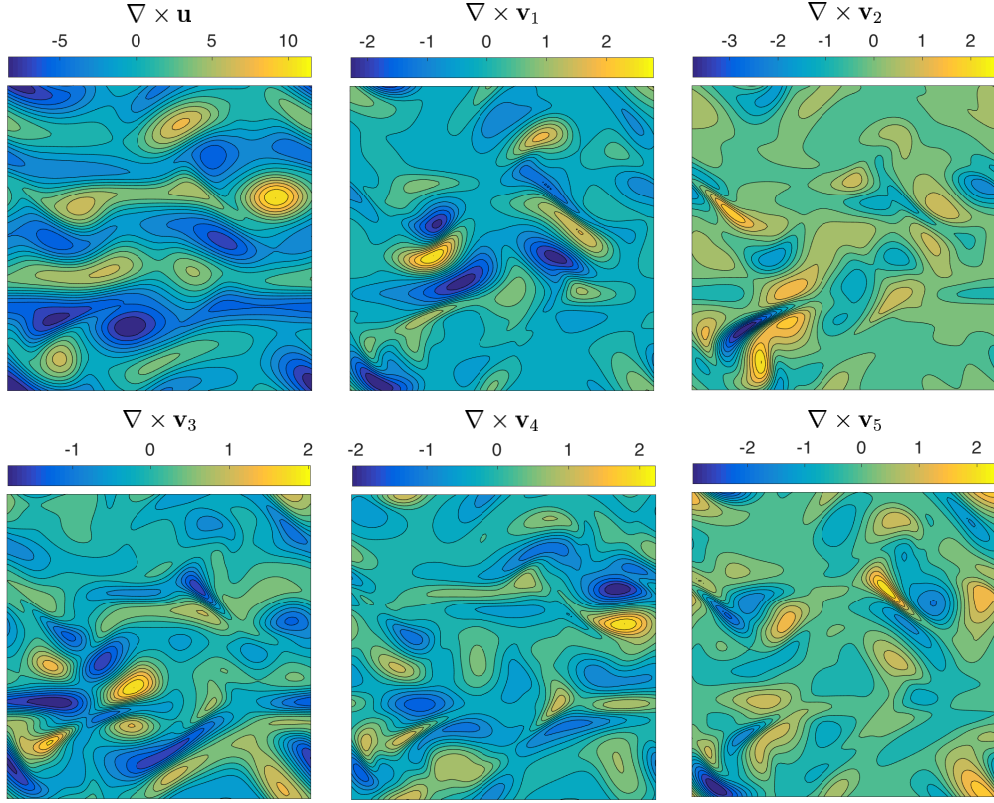
16

FIG. 10. Snapshots of the curl of $\mathbf{u}$, $\mathbf{v}_1$, $\mathbf{v}_2$, $\mathbf{v}_3$, $\mathbf{v}_4$ and $\mathbf{v}_5$ (from top left to bottom right, respectively) at time $t = 34.6$. The colors correspond to the only non-zero component of the curls. All panels show the entire domain $[0, 2\pi] \times [0, 2\pi]$.

significantly just before the bursting (see figure 11) while the energy dissipation is within one standard deviation from its mean value at that time. Since the eigenvalue tends to oscillate rapidly and irregularly, mere visual inspection does not yield a satisfactory conclusion. In the next section, we quantify the correlation between the eigenvalue λ_1 and the energy dissipation D through conditional statistics.

E.   Conditional statistics

In order to quantify the predictive power of the eigenvalues of reduced symmetric matrix $\mathbf{S}_r$, we use Bayesian statistics [46]. First, for a given scalar quantity $q(t)$, we define

$$\bar{q}(t; t_i, t_f) = \max_{\tau \in [t+t_i, t+t_f]} q(\tau), \tag{23}$$
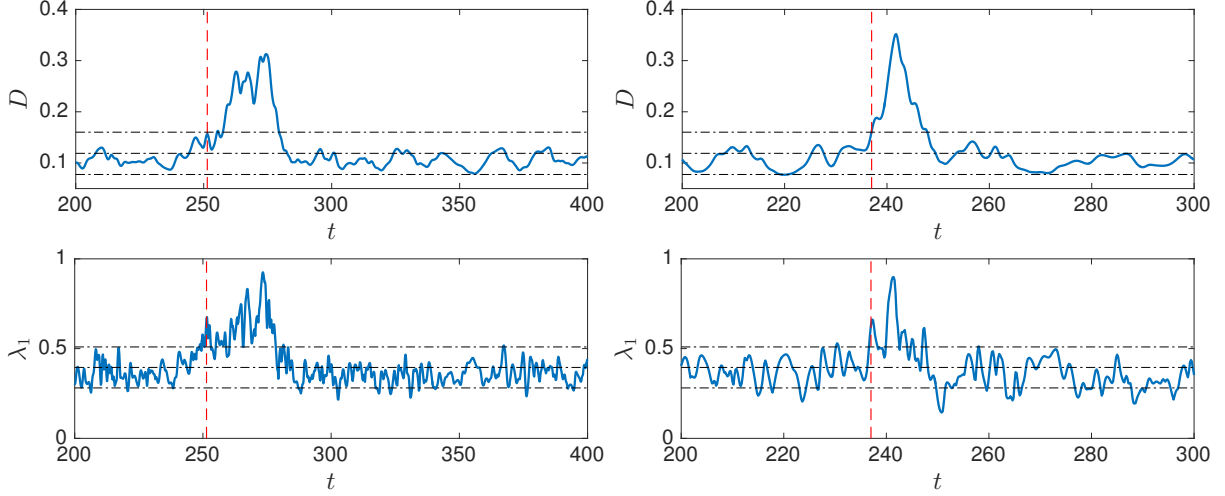
FIG. 11. Evolution of the energy dissipation D and the eigenvalue λ_1 along two different trajectories (each column corresponds to a separate trajectory). The horizontal dashed lines mark the mean, the mean plus one standard deviation and the mean minus one standard deviation of the corresponding quantity.
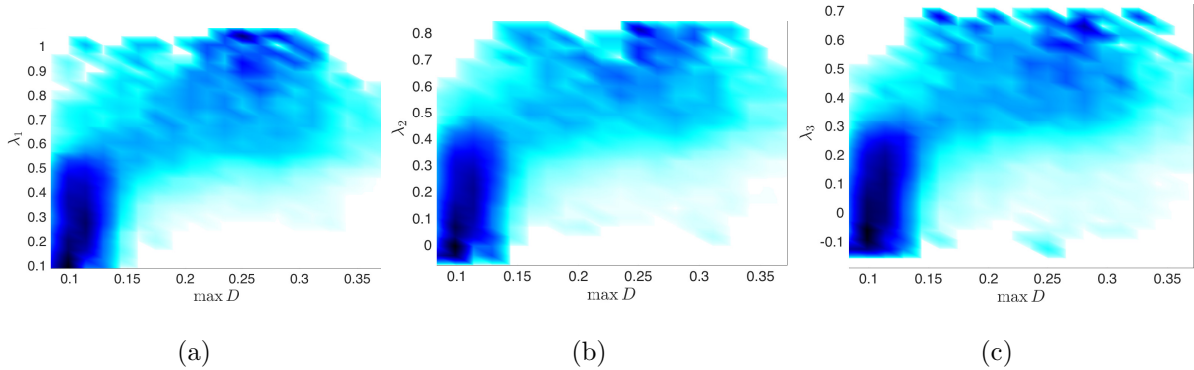

(a)   (b)   (c)

FIG. 12. Conditional PDF of the first three eigenvalues of $\mathbf{S}_8$ and the maximal dissipation $\max_\tau D$ where the maximum is taken over $\tau \in [t + t_i, t + t_f]$ with $t_i = 3$ and $t_f = 4$.

where $0 < t_i < t_f$ are prescribed numbers. At any time t, the quantity $\bar{q}(t; t_i, t_f)$ equals the maximum value of q over a future time interval $[t + t_i, t + t_f]$. For notational simplicity, we use the shorthand notation $\bar{q}(t)$ for $\bar{q}(t; t_i, t_f)$.

We would like to quantify the predictive power of a given indicator $\alpha(t)$. In particular, we would like to assess whether large peaks of the indicator $\alpha(t)$ at a time t coincide with large values of the observable q over a future time interval $[t + t_i, t + t_f]$.

To this end, we use the joint probability density function (PDF) of $\bar{q}$ and α. The joint

PDF of $\bar{q}$ and α is defined as the scalar function $p_{\bar{q},\alpha} : \mathbb{R} \times \mathbb{R} \to \mathbb{R}^+$ that satisfies

$$\mathcal{P}(q_1 \leq \bar{q} \leq q_2, \alpha_1 \leq \alpha \leq \alpha_2) = \int_{q_1}^{q_2} \int_{\alpha_1}^{\alpha_2} p_{\bar{q},\alpha}(\bar{q}', \alpha') \mathrm{d}\bar{q}' \, \mathrm{d}\alpha', \tag{24}$$

for all $q_1, q_2, \alpha_1, \alpha_2 \in \mathbb{R}$ where $\mathcal{P}$ denotes the probability. The conditional probability density function of $\bar{q}$ (conditioned on α) is then given by

$$p(\bar{q}|\alpha) = \frac{p_{\bar{q},\alpha}(\bar{q}, \alpha)}{p_\alpha(\alpha)}, \tag{25}$$

where p_α is the probability density function of the indicator α.

Roughly speaking, $p(\bar{q}(t) = \bar{q}_0 | \alpha(t) = \alpha_0)$ denotes the likelihood of the maximum of the scalar q over the time interval $[t + t_i, t + t_f]$ being q_0 given that the value of α at time t is α_0. More precisely, the conditional probability of $\bar{q}$ over the time interval $[t + t_i, t + t_f]$ being greater than a prescribed value q_0 is given by

$$\mathcal{P}\left(\bar{q}(t) > q_0 | \alpha(t) = \alpha_0\right) = \mathcal{P}\left(\max_{\tau \in [t+t_i, t+t_f]} q(\tau) \geq q_0 | \alpha(t) = \alpha_0\right)$$
$$= \int_{q_0}^{\infty} p(\bar{q}'|\alpha_0) \mathrm{d}\bar{q}'. \tag{26}$$

In particular, if an extreme event corresponds to values of q greater than a prescribed critical value q_c, the probability of the extreme event taking place over the time interval $[t + t_i, t + t_f]$, given that $\alpha(t) = \alpha_0$, is measured by

$$P_{EE}(\alpha_0) := \mathcal{P}\left(\max_{\tau \in [t+t_i, t+t_f]} q(\tau) \geq q_c | \alpha(t) = \alpha_0\right) = \int_{q_c}^{\infty} p(\bar{q}'|\alpha_0) \mathrm{d}\bar{q}', \tag{27}$$

where P_{EE} denotes the probability of an extreme event taking place over the future time interval $[t + t_i, t + t_f]$.

In the case of the Kolmogorov flow, the observed quantity q is the energy dissipation D and the indicator α is one the eigenvalues λ_i of the reduced symmetric tensor $\mathbf{S}_r$ (see equation (9)) with $r = 8$. The joint PDF $p_{\bar{D},\lambda_i}$ and the PDF p_{λ_i} are approximated from a large set of numerical simulations containing roughly $85,000$ data points. The conditional PDF $p(\bar{D}|\lambda_i)$ then is computed through the Bayesian relation (25).

Figure 12 shows the resulting conditional PDF $p(\bar{D}|\lambda_i)$ for the three largest eigenvalues of $\mathbf{S}_r$. As the three conditional PDFs are qualitatively similar, we will only discuss the one corresponding to the largest eigenvalue λ_1.

The conditional PDF exhibits a 'bimodal' structure. For $0 < \lambda_1(t) < 0.55$, the maximal future value of the energy dissipation $\max_{\tau \in [t+t_i, t+t_f]} D(\tau)$ is most likely to lie between 0
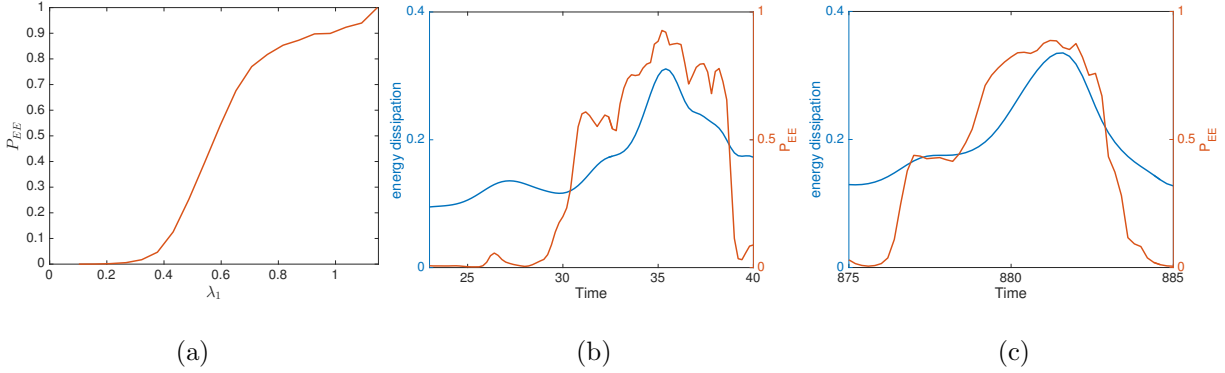
19

(a)   (b)   (c)

FIG. 13. $t_i = 3$ and $t_f = 5$. Left: Probability of the extreme energy dissipation P_{EE} as a function of the value of the indicator λ_1.

and 0.15 (the lower left dark region in figure 12(a)). A sharp transition is observed for $0.55 < \lambda_1(t)$ such that for this range of the eigenvalue λ_1, the energy dissipation is more likely to assume values larger that 0.15 over the future time interval $[t + t_i, t + t_f]$.

Using this conditional PDF, we compute the probability of extreme events P_{EE} from equation (27). From the time series presented in figure 5, it is reasonable to associate a burst with values of the energy dissipation larger than 0.2. We use this value as the critical energy dissipation (i.e. $D_c = 0.2$) above which an extreme event is recorded. The resulting probability function is plotted in figure 13(a). If at a time instant t, the value of λ_1 is smaller than 0.4, the probability of $D(\tau) > D_c$ over the future time interval $\tau \in [t+t_i, t+t_f]$ is virtually zero. For larger values of λ_1, the probability of an extreme event increases monotonically. At $\lambda_1 = 0.55$, the probability of an upcoming extreme event is greater than 50%. Eventually, this probability grows to above 80% at $\lambda_1 \simeq 0.8$.

Using the computed probability of extreme event P_{EE}, we predict, at every given time t, the probability that an extreme event takes place over the future time interval $[t+t_i, t+t_f]$. Figure 13 (panels (b) and (c)), shows two select time windows over which an extreme event occurs. Away from the extreme event, the probability P_{EE} is very low. Just before the extreme event, this probability grows predicting the upcoming extreme events at least $t_i = 3$ time units in advance.

While the above results are reported at $Re = 40$, we point out that similar conclusions hold at higher Reynolds numbers. Figure 14, for instance, shows the conditional PDF and the probability of extreme events at $Re = 100$. To fully resolve the flow, the higher resolution of 256×256 Fourier modes are used at this Re number. On the other hand, to keep the
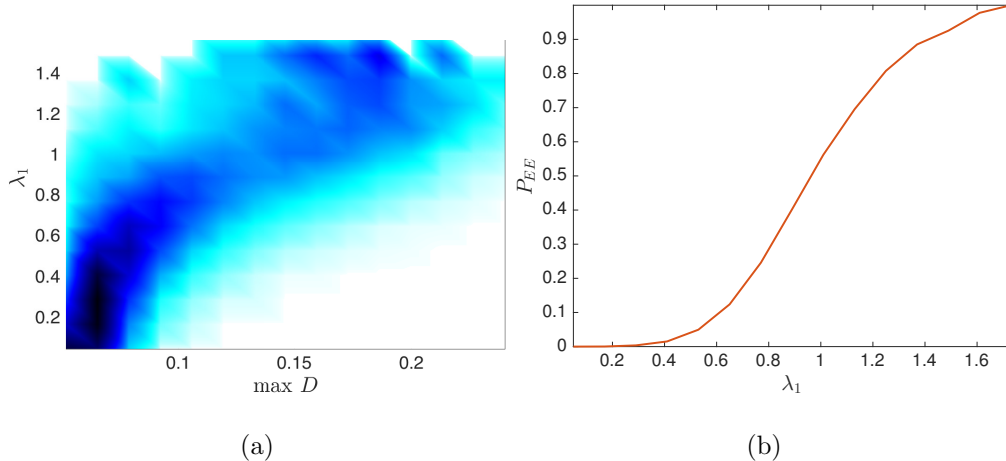
20

FIG. 14. Conditional PDF (a) and the probability of upcoming extreme energy dissipation (b) for Reynolds number $Re = 100$.

computational cost reasonable, the linearized operator is reduced to four OTD modes, i.e., $r = 4$.

F. Comparison with dynamic mode decomposition

We carry out a caparison in this section to highlight that the correct choice of the modes to which the linear operator $\mathbf{L_u}$ is reduced is essential. To this end, we repeat the analysis of Section IV E, but this time we reduce the operator $\mathbf{L_u}$ to the modes obtain from Dynamic Mode Decomposition (DMD). DMD was proposed by Schmid [47] for extracting a linear approximation to the flow map of a nonlinear dynamical system. The resulting *dynamic modes* (or DMD modes) have proven insightful in the analysis of fluid flows [48, 49] and shown to have intricate connections to the Koopman and Fourier modes of time periodic solutions [50, 51].

Since the DMD modes are not flow invariant (see Definition 1), the reduction of the linear operator $\mathbf{L_u}$ to these modes is not dynamically meaningful. As a result, the eigenvalues of the symmetric tensor reduced to DMD modes are not expected to reflect the true growth (or decay) of perturbations. To illustrate this, we use the algorithm introduced by Schmid [47] to compute DMD modes from 500 sequential snapshots of the Kolmogorov flow, each 0.2 time units apart. Next we restrict the operator $\mathbf{L_u}$ to the eight most dominant DMD modes and compute the largest eigenvalue of its symmetric part along all previously computed turbulent
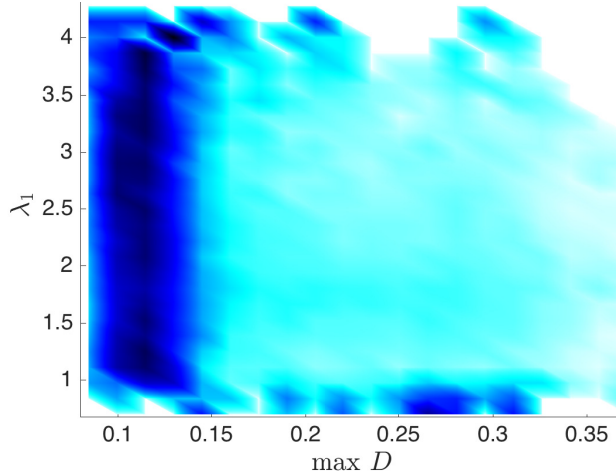
21

FIG. 15. Same as figure 12(a) but now the linear operator is reduced to the eight most dominant DMD modes.

trajectories $\mathbf{u}(t)$. The resulting conditional PDF is shown in figure 15. As opposed to the OTD modes (cf. figure 12), the extreme episodes of the energy dissipation do not show a signature in the DMD-reduced operator.

V. SPATIALLY LOCALIZED EXTREME EVENTS

The energy dissipation in turbulent flows, as discussed in Section IV, is a global feature of the state. In spatiotemporal chaos, however, local rare extreme events, in the form of spatially localized structures, are possible . A famous example of such localized extreme events is the ocean rogue waves. Such localized phenomena cannot be quantified from global quantities such as the eigenvalues of the linear operator.

In this section, we illustrate that localized features of the OTD modes can still be of significance for the analysis of spatially localized extreme events. To illustrate this, we consider the modified nonlinear Schrödinger (MNLS) equation which is an approximation to the evolution of sea surface elevation in deep waters [52]. The MNLS equation is a higher order perturbative approximation compared to the nonlinear Schrödinger equation derived by Zakharov [53]. Recently, more quantitative methods for the analysis of the extreme waves in the MNLS equation have been developed [54–56].

22

A. MNLS equation

For a complex valued function $u(x,t)$, the MNLS equation (in dimensionless variables) reads

$$\partial_t u = F(u), \tag{28}$$

with

$$F(u) = -\frac{1}{2}\partial_x u - \frac{i}{8}\partial_x^2 u + \frac{1}{16}\partial_x^3 u - \frac{i}{2}|u|^2 u - \frac{3}{2}|u|^2\partial_x u - \frac{1}{4}u^2\partial_x u^* - i\,u\Phi(u), \tag{29}$$

where $i = \sqrt{-1}$, $x \in [0, L]$ and $u(x,t) \in \mathbb{C}$. The asterisk sign denotes the complex conjugation. The function Φ is derived from the velocity potential ϕ,

$$\Phi(u) := \partial_x \phi \Big|_{z=0} = -\frac{1}{2}\mathcal{F}^{-1}\left[|k|\mathcal{F}[|u|^2]\right], \tag{30}$$

where $\mathcal{F}$ denotes the Fourier transform. The modulus $|u(x,t)|$ is the wave envelope for the surface elevation $h(x,t)$. To the leading order approximation, we have $h(x,t) = \text{Re}\left[u(x,t)\exp(i(x-t))\right]$.

We solve the MNLS equation with the initial conditions $u(x,0) = u_0(x)$ with Gaussian energy spectra and random phases. More precisely, the Fourier transform of the initial condition is given by

$$\widehat{u_0}(k) = \sqrt{2\frac{2\pi}{L}N(q_k)}e^{i\theta_k}, \tag{31}$$

where

$$N(q_k) := \frac{\epsilon^2}{\sigma\sqrt{2\pi}}e^{-\frac{q_k^2}{2\sigma^2}}, \tag{32}$$

is a normal distribution, θ_k are random phases uniformly distributed over $[0, 2\pi]$ and $q_k = 2\pi k/L$ is the wave number over the periodic domain of length L. There are three free parameters: ϵ that controls the wave height, σ which is the standard deviation of the Gaussian distribution and controls the width of the spectrum of the wave and finally L which is the length of the periodic domain, $x \in [0, L]$.

It is well-known that the Gaussian wave groups (31) can grow due to the Benjamin-Feir instability [57] to form extreme waves. The Benjamin-Feir Index (BFI) $2\sqrt{2}\epsilon/\sigma$ provides an indicator for the probability of the extreme waves taking place. For large enough BFI, the nonlinear terms dominate, leading to large amplitude waves [58]. If BFI is too large, however, the extreme waves happen quite often. To realize rare extreme waves, therefore, a
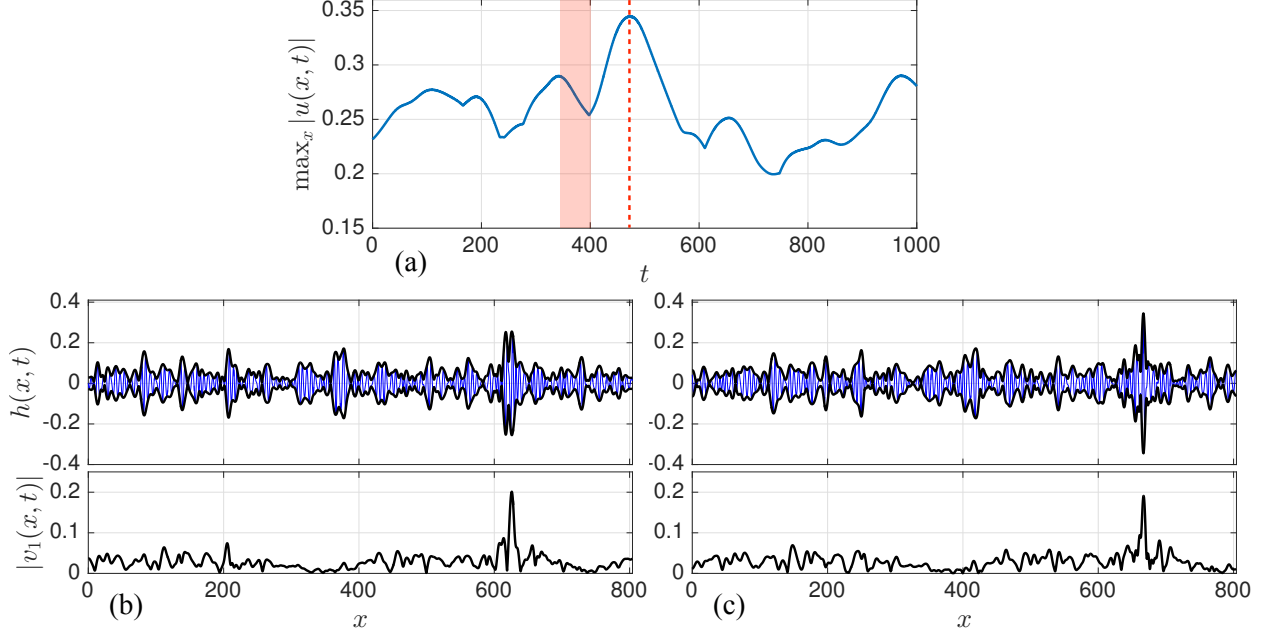
FIG. 16. (a) The spatial maximum of $|u|$ as a function of time t. An extereme event occurs at around $t = 475$ where $\max_x |u| \simeq 0.34$. (b, c) The surface elevation $h(x,t)$ (blue color) and and the modulus of the OTD mode $|v_1|$ at times $t = 400$ (b) and $t = 475$ (c). The thick black curves in the plots of $h(x,t)$ mark the envelopes $\pm |u(x,t)|$.

moderate BFI value should be used. Following Mohamad *et al.* [56], we use the parameter values $\epsilon = 0.05$, $\sigma = 0.2$ and $L = 256\pi$, resulting in BFI= 0.71. This BFI value allows for the formation of extreme waves at a moderate frequency (not too often and not too rare).

We solve the MNLS (29) equation and its associated OTD equation (19) where $\langle \cdot, \cdot \rangle$ now denotes the standard L^2 inner product on complex valued functions,

$$\langle v, w \rangle := \int_0^L v(x)w^*(x)\mathrm{d}x. \tag{33}$$

The initial condition for the OTD modes are sinusoidal and are given by

$$v_i(x, 0) = \sqrt{\frac{2}{L}} \sin\left(\frac{2\pi i}{L}x\right).$$

The computation of the OTD modes requires the linearization of the operator (29) as outlined in Appendix A.

For the numerical integration of the MNLS equation (and its associated OTD equation), we use a second-order exponential time differencing scheme [59, 60] in time and a pseudo-spectral scheme for evaluating the spatial derivatives with 2^{11} Fourier modes. For
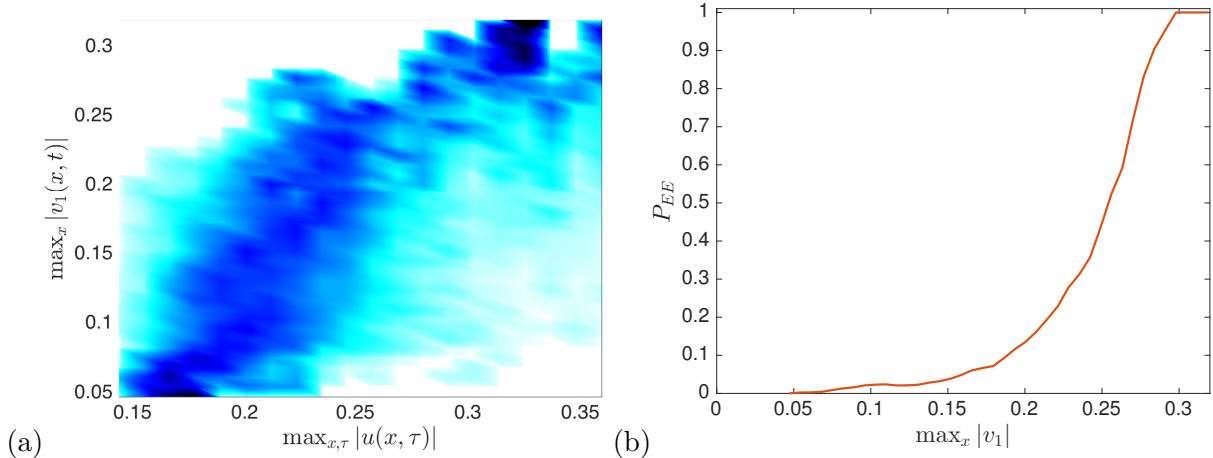
24

(a)   (b)

FIG. 17. (a) Conditional PDF for the maximum modulus of the OTD mode v_1 and the solution of the MNLS equation. The maxima are taken over $x \in [0, L]$ and $\tau \in [t + t_i, t + t_f]$ with $t_i = 25$ and $t_f = 26$. (b) The probability of an extreme event P_{EE} computed from the conditional PDF.

the statistical analysis presented in the next section, we compute 200 MNLS trajectories, each of length 1000 time units, from the initial conditions of the form (31).

B. Extreme waves and the OTD modes

Figure 16 shows a time window over which an extreme wave appears at around $t = 475$ with a wave height of approximately 0.34 (see panel (a)). Panel (b) shows a snapshot of the wave, 75 time units earlier at $t = 400$. It exhibits a twin wave packet at around $x = 610$. Whether this twin wave packets lead to an extreme wave depends on the energies and the phases of the packets. A simple extrapolation will rule out the possibility of an extreme wave since the wave height has been decaying over the last 50 time units (the red shaded area in figure 16(a)).

During this decay period, however, the OTD mode v_1 shows a persistent localized peak at the same location as the twin wave packets. This signals a persistent localized instability that grows to lead to the extreme wave at time $t = 475$ as shown in figure 16(c).

As in the case of the Kolmogorov flow, we use Bayesian statistics to quantify the relation between extreme MNLS waves and the localized peaks of the associated OTD modes. Based on the foregoing observation, we use the maximum height of the first OTD mode v_1 as the indicator α. The quantity to be predicted is the maximum height of the MNLS solution u.

25

More precisely,

$$q(t) = \max_{x \in [0,L]} |u(x,t)|, \quad \alpha(t) = \max_{x \in [0,L]} |v_1(x,t)|.$$

The conditional PDF $p(\bar{q}|\alpha)$ is computed as in Section IV E. For a given critical wave height h_c, the probability of the rare event is given as in equation (27) by

$$P_{EE}(\alpha_0) := \mathcal{P} \left(\max_{\tau \in [t+t_i, t+t_f]} \max_{x \in [0,L]} |u(x,\tau)| \geq h_c \bigg| \max_{x \in [0,L]} |v_1(x,t)| = \alpha_0 \right). \tag{34}$$

Figure 17 shows the conditional PDF $p(\bar{q}|\alpha)$ and the probability of an extreme wave with the critical wave height $h_c = 0.28$. This critical wave height is approximately the mean plus two standard deviation of $\max_x |u|$ for all the data computed.

VI.   SUMMARY AND CONCLUSIONS

We proposed operational indicators for the prediction of rare extreme events (or bursts) in high dimensional dynamical systems. The motivation for our indicators is based on the observations made about slow-fast systems where the bursts occur along orbits that are transverse and homoclinic to the slow manifold [25–27]. This geometric picture does not lead to an operational method in complex high-dimensional systems where a clear separation between the slow and fast variables is unavailable [28].

We showed that for such systems a signature of bursting can be traced in the eigenvalues of the symmetric part of the linearized dynamics. More precisely, we use the largest eigenvalue λ_1 of the symmetric part of the linearized operator as our indicator. Computing these eigenvalues in high dimensional systems is computationally expensive. Thanks to the recently introduced notion of Optimally Time Dependent (OTD) modes [29], however, one can reduce the linear operator, in a dynamically consistent fashion, to its most unstable subspace. The reduced operator is low dimensional and its invariants can be readily computed.

We devised a low dimensional ODE in Section III which has an unambiguous bursting mechanism. For this simple model we showed that the eigenvalue λ_1 becomes uniformly positive several time units before the burst. This allows for instantaneous perturbations within the corresponding subspace to grow. Moreover, the OTD mode aligns with the direction of the growth (i.e. orthogonal to the $x - y$ plane). These together successfully predict the upcoming extreme event.

In the body forced Navier–Stokes equation considered in Section IV, the situation is more complicated as the symmetric part of the reduced operator has several eigenvalues that are positive for all times. The largest eigenvalue λ_1, however, increases significantly before a burst in the energy dissipation takes place. Using Bayesian statistic, we showed that large values of the eigenvalue λ_1 do in fact predict upcoming bursts in the energy dissipation. While the results are presented for prediction time $t_i = 3$, they are robust to small variations of this time window. If the prediction time is set too large (larger than $t_i = 5$, here), however, the indicator fails to predict the bursts. The predictability time, of course, is problem dependent and is expected to be inversely proportional to the dominant Lyapunov exponent of the system [61].

We also considered extreme waves in a unidirectional model of the nonlinear surface waves in deep ocean. As opposed to the energy dissipation in Navier–Stokes equations, extreme waves are localized in space. Therefore, we do not expect the eigenvalue λ_1 (as a global quantity) to bear significance in their creation. We observe instead that the most unstable OTD mode localizes and grows before an extreme wave appears. The spatial location where the OTD mode localizes is precisely where the extreme wave occurs later in time. This observation indicates a promising direction for space-time prediction of the extreme water waves, complementing the recent work of Cousins and Sapsis [54, 55].

Finally, we point out that the OTD modes are instrumental to the evaluation of our indicators. This imposes an additional computational cost as the OTD equations need to be solved simultaneously with the governing equations. Moreover, it necessitates that a model of the system is available as a set of differential equations. Therefore, modifying the indicator so that it is applicable to model-independent predictions is highly desirable. Future work also involves the application of the presented ideas on the filtering and prediction of stochastic dynamical systems exhibiting rare events.

A. THE LINEARIZATION OF THE MNLS EQUATION

We denote the linearization (or Gâteaux differential) of the differential operator F defined in equation (29) by $L_u(\cdot)$ which reads

$$
\begin{aligned}
L_u(v) := \lim_{\epsilon \to 0} & \frac{F(u + \epsilon v) - F(u)}{\epsilon} \\
= & -\frac{1}{2}\partial_x v - \frac{\mathrm{i}}{8}\partial_x^2 v + \frac{1}{16}\partial_x^3 v \\
& - \frac{\mathrm{i}}{2}\left(2|u|^2 v + u^2 v^*\right) \\
& - \frac{3}{2}\left(u^* v \partial_x u + u v^* \partial_x u + |u|^2 \partial_x v\right) \\
& - \frac{1}{4}\left(2uv\partial_x u^* + u^2 \partial_x v^*\right) \\
& + \frac{\mathrm{i}}{2}u\,\mathcal{F}^{-1}\big[|k|\,\mathcal{F}[uv^* + vu^*]\big] + \frac{\mathrm{i}}{2}v\,\mathcal{F}^{-1}\big[|k|\mathcal{F}(|u|^2)\big].
\end{aligned}
\tag{35}
$$

The only nontrivial calculation above is the last line, corresponding to the linearization of the term $u\Phi(u)$ in (29), which we detail below. First we note that

$$
(u + \epsilon v)\Phi(u + \epsilon v) - u\Phi(u) = \epsilon u\, \mathrm{d}\Phi(u; v) + \epsilon v \Phi(u) + \mathcal{O}(\epsilon^2),
\tag{36}
$$

where

$$
\mathrm{d}\Phi(u; v) = \lim_{\epsilon \to 0} \frac{\Phi(u + \epsilon v) - \Phi(u)}{\epsilon}.
\tag{37}
$$

From the definition of Φ (see equation (30)), we have

$$
\begin{aligned}
\mathcal{F}[\Phi(u + \epsilon v)] &= -\frac{1}{2}|k|\,\mathcal{F}[|u + \epsilon v|^2] \\
&= \mathcal{F}[\Phi(u)] - \epsilon\frac{1}{2}|k|\,\mathcal{F}[uv^* + vu^*] + \mathcal{O}(\epsilon^2),
\end{aligned}
\tag{38}
$$

which yields

$$
\mathrm{d}\Phi(u; v) = -\frac{1}{2}\mathcal{F}^{-1}\big[|k|\,\mathcal{F}[uv^* + vu^*]\big].
\tag{39}
$$

This completes the derivation of (35).

---

[1] K. Dysthe, H. E. Krogstad, P. Müller, and P. Muller, Annu. Rev. Fluid Mech. **40**, 287 (2008).

[2] P. Muller, C. Garrett, and A. Osborne, Oceanography **18**, 66 (2005).

[3] U. Frisch, Annals of the New York Academy of Sciences **357**, 359 (1980).

[4] A. J. Majda and Y. Lee, PNAS **111**, 6548 (2014).

[5] W. Cousins and T. P. Sapsis, Physica D **280**, 48 (2014).

[6] W. Cai, S. Borlace, M. Lengaigne, P. Van Rensch, M. Collins, G. Vecchi, A. Timmermann, A. Santoso, M. J. McPhaden, L. Wu, *et al.*, Nature Climate Change **4**, 111 (2014).

[7] N. Chen, A. J. Majda, and D. Giannakis, Geophysical Research Letters **In Press** (2014).

[8] F. Takens, "Dynamical systems and turbulence, warwick 1980: Proceedings of a symposium held at the university of warwick 1979/80," (Springer Berlin Heidelberg, 1981) Chap. Detecting strange attractors in turbulence, pp. 366–381.

[9] T. Sauer, J. A. Yorke, and M. Casdagli, Journal of statistical Physics **65**, 579 (1991).

[10] T. Berry, D. Giannakis, and J. Harlim, Physical Review E **91**, 032915 (2015).

[11] M. O. Williams, P. J. Schmid, and J. N. Kutz, Multiscale Modeling & Simulation **11**, 522 (2013).

[12] E. Chiavazzo, C. Gear, C. Dsilva, N. Rabin, and I. Kevrekidis, Processes **2**, 112 (2014), arXiv:arXiv:1307.6849v1.

[13] Z. Zhao and D. Giannakis, Nonlinearity , Submitted (2015).

[14] S. Sargsyan, S. L. Brunton, and J. N. Kutz, Physical Review. E **92**, 033304 (2015).

[15] Z. Y. Wan and T. P. Sapsis, Physica D (2016).

[16] T. Berry and J. Harlim, Physica D **320**, 57 (2016).

[17] A. J. Majda and J. Harlim, *Filtering Complex Turbulent Systems* (Cambridge University Press, 2012).

[18] D. Giannakis and A. J. Majda, Proceedings of the National Academy of Sciences **109**, 2222 (2012).

[19] S. Bialonski, G. Ansmann, and H. Kantz, Phys. Rev. E **92**, 042910 (2015).

[20] N. Fenichel, Journal of Differential Equations **31**, 53 (1979).

[21] J. Guckenheimer and P. Holmes, *Nonlinear oscillations, dynamical systems, and bifurcations of vector fields*, Vol. 42 (New York, Springer Verlag, 1983).

[22] S. Wiggins, *Normally hyperbolic invariant manifolds in dynamical systems*, Applied Mathematical Sciences No. 105 (App. Math. Sci., Springer, 1994).

[23] I. G. Kevrekidis, Supercomputer Research in Chemistry and Chemical Engineering **Chapter 16**, 284 (1987).

[24] I. G. Kevrekidis, B. Nicolaenko, and J. C. Scovel, SIAM J. Appl. Math. **50**, 760 (1990).

[25] M. Desroches, J. Guckenheimer, B. Krauskopf, C. Kuehn, H. M. Osinga, and M. Wechsel-berger, SIAM Review **54**, 211 (2012).

[26] A. Roberts, E. Widiasih, A. Timmermann, C. K. R. T. Jones, and J. Guckenheimer, arXiv preprint arXiv:1511.07472 (2015).

[27] G. Haller, Communications on pure and applied mathematics **52**, 1 (1999).

[28] Z. Ren and S. B. Pope, Combustion Theory and Modelling **10**, 361 (2006).

[29] H. Babaee and T. P. Sapsis, arXiv (2015), submitted.

[30] V. I. Arnold, *Ordinary differential equations* (Springer, 1992) translated by R. Cooke.

[31] J. M. Greene and J.-S. Kim, Physica D: Nonlinear Phenomena **24**, 213 (1987).

[32] L. Dieci and C. Elia, Mathematics and Computers in Simulation **79**, 1235 (2008).

[33] G. Haller and T. Sapsis, SIAM Journal on Applied Dynamical Systems **9**, 611 (2010).

[34] U. Frisch, *Turbulence, The Legacy of A. N. Kolmogorov* (Cambridge {U}niversity {P}ress, 1996).

[35] M. Farazmand, J. Fluid Mech. (2016), in press.

[36] P. Constantin, C. Foias, and R. Temam, Physica D: Nonlinear Phenomena **30**, 284 (1988).

[37] P. K. Friz and J. C. Robinson, Physica D **148**, 201 (2001).

[38] N. K.-R. Kevlahan, J. Alam, and O. V. Vasilyev, J. Fluid Mech. **570**, 217 (2007).

[39] G. Berkooz, P. Holmes, and J. Lumley, Ann. Rev. Fluid Mech. **25**, 539 (1993).

[40] N. Platt, L. Sirovich, and N. Fitzmaurice, Phys. Fluids A **3**, 681 (1991).

[41] C. Marchioro, Commun. Math. Phys. **105**, 99 (1986).

[42] C. Foias, O. Manley, R. Rosa, and R. Temam, *Navier–Stokes Equations and Turbulence* (Cambridge Univ. Press, Cambridge, 2001).

[43] G. J. Chandler and R. R. Kerswell, J. Fluid Mech. **722**, 554 (2013).

[44] R. Peyret, *Spectral methods for incompressible viscous flow*, Vol. 148 (Springer, 2013).

[45] J. R. Dormand and P. J. Prince, J. Comp. App. Math. **6**, 19 (1980).

[46] A. Gelman, J. B. Carlin, H. S. Stern, D. B. Dunson, A. Vehtari, and D. B. Rubin, *Bayesian Data Analysis*, 3rd ed., Chapman & Hall/CRC Texts in Statistical Science (Taylor & Francis, 2013).

[47] P. J. Schmid, J. Fluid Mech. **656**, 5 (2010).

[48] P. J. Schmid, L. Li, M. Juniper, and O. Pust, Theor. Comput. Fluid Dyn. **25**, 249 (2011).

[49] P. J. Schmid, Experiments in fluids **50**, 1123 (2011).

[50] C. W. Rowley, I. Mezic, S. Bagheri, P. Schlatter, and D. S. Henningson, J. Fluid Mech. **641**, 115 (2009).

[51] K. K. Chen, J. H. Tu, and C. W. Rowley, Journal of Nonlinear Science **22**, 887 (2012).

[52] K. B. Dysthe, Proceedings of the Royal Society of London A: Mathematical, Physical and Engineering Sciences **369**, 105 (1979).

[53] V. E. Zakharov, Journal of Applied Mechanics and Technical Physics **9**, 190 (1968).

[54] W. Cousins and T. P. Sapsis, Phys. Rev. E **91**, 063204 (2015).

[55] W. Cousins and T. P. Sapsis, J. Fluid Mech **790**, 368 (2016).

[56] M. A. Mohamad, W. Cousins, and T. P. Sapsis, arXiv preprint arXiv:1511.02392 (2015).

[57] T. B. Benjamin and J. E. Feir, J. Fluid Mech. **27**, 417 (1967).

[58] P. A. E. M. Janssen, Journal of Physical Oceanography **33**, 863 (2003).

[59] S. Cox and P. Matthews, Journal of Computational Physics **176**, 430 (2002).

[60] H. Berland, B. Skaflestad, and W. M. Wright, ACM Transactions on Mathematical Software (TOMS) **33**, 4 (2007).

[61] H. Broer and F. Takens, *Dynamical systems and chaos*, Vol. 172 (Springer Science & Business Media, 2010).